


TT19 快速使用步骤说明 V1.0


一. 使用步骤:

注意: 若您购买的设备已带卡并已插电池, 请忽略步骤 1、2、3

1. 用户拿到机器后需先插 SIM 卡, 如下图

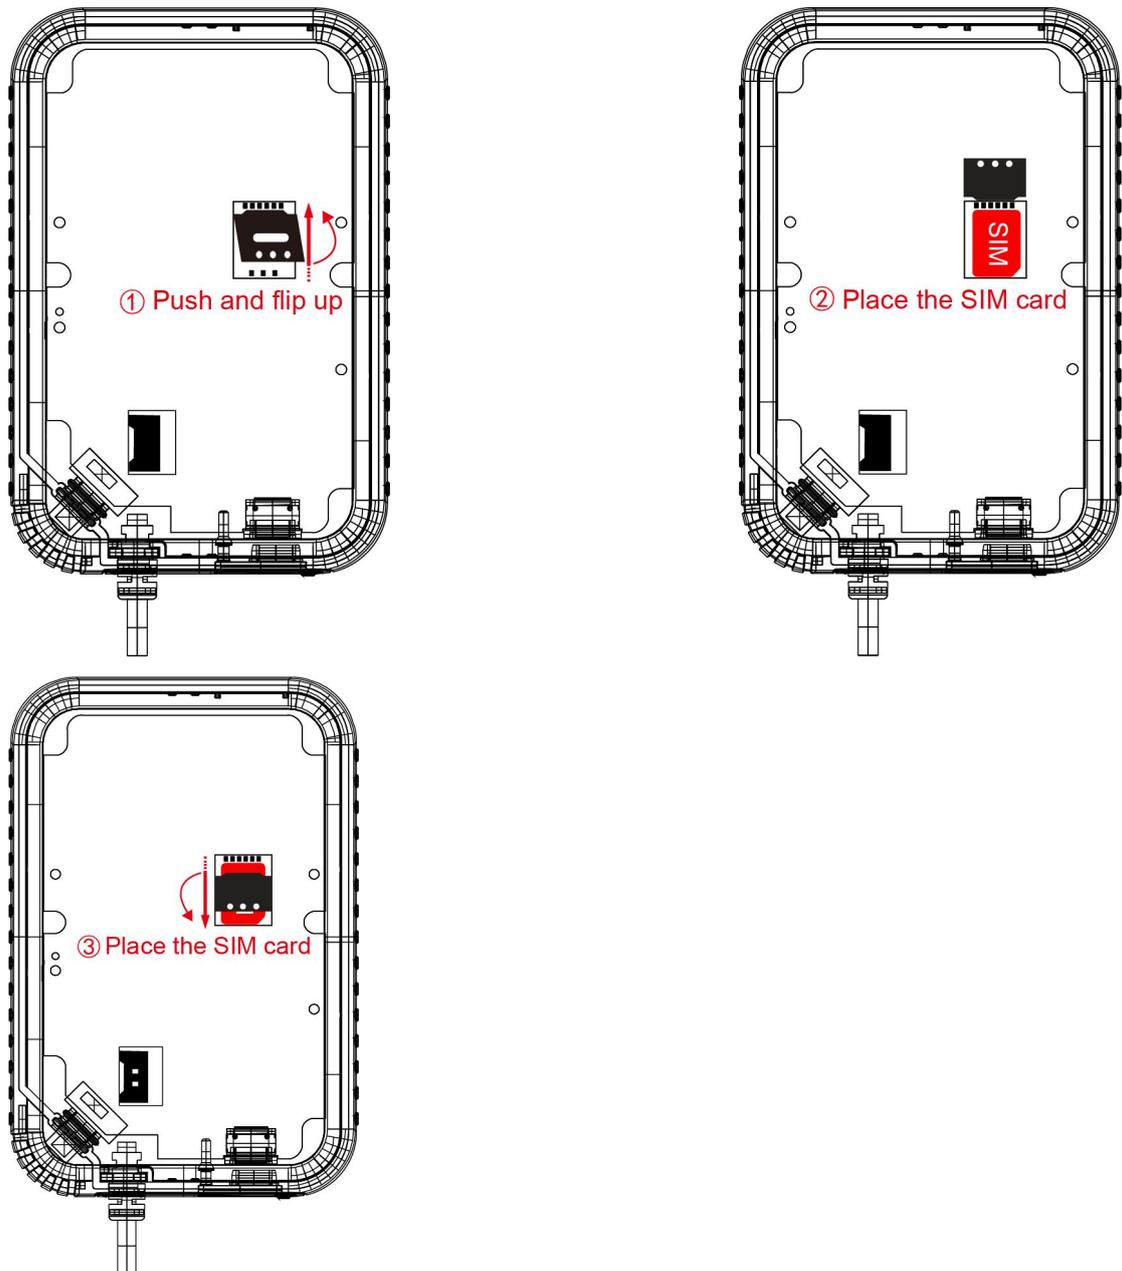

2. 插入电池，如图

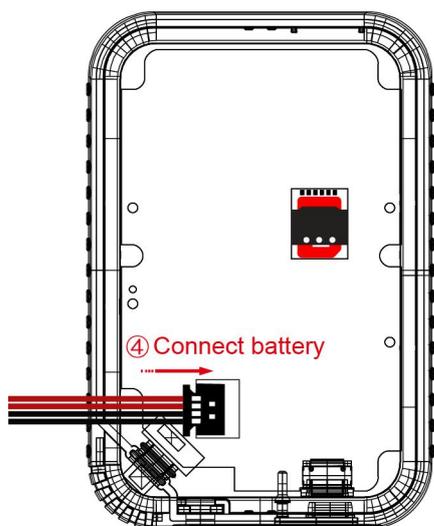

3. 装外壳并锁螺丝


4. 设备开机，开机前可短按“START”键，若LCD显示“OFF”，则代表机器关机；长按“START”键开机，“OK”灯长亮绿灯，LCD显示内容，代表机器开机，如图



注意：若您的设备不需要配置参数，请忽略步骤 5、6、7、8


5. 从 TZONE 网站上下载 TT19 的配置软件并打开：

<http://d.tzonedigital.com/Download.aspx?Type=TT19>

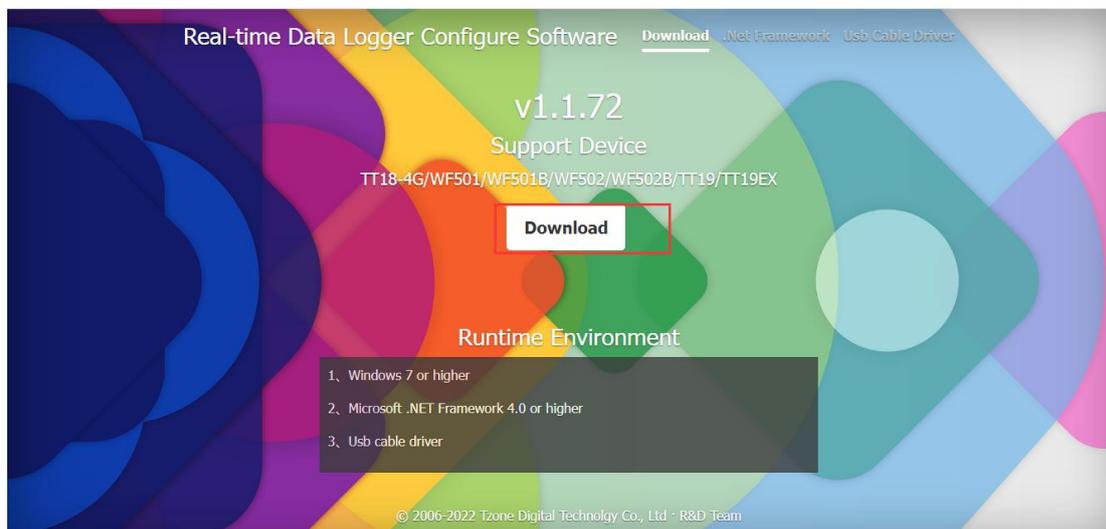


6. 通过 USB 线将设备连接到电脑，在电脑上弹出新磁盘后，点击“读取”读取设备信息。


注意：如果设备无法读取，请重新连接 USB 线并确保有生成新的磁盘，再点击“读取”

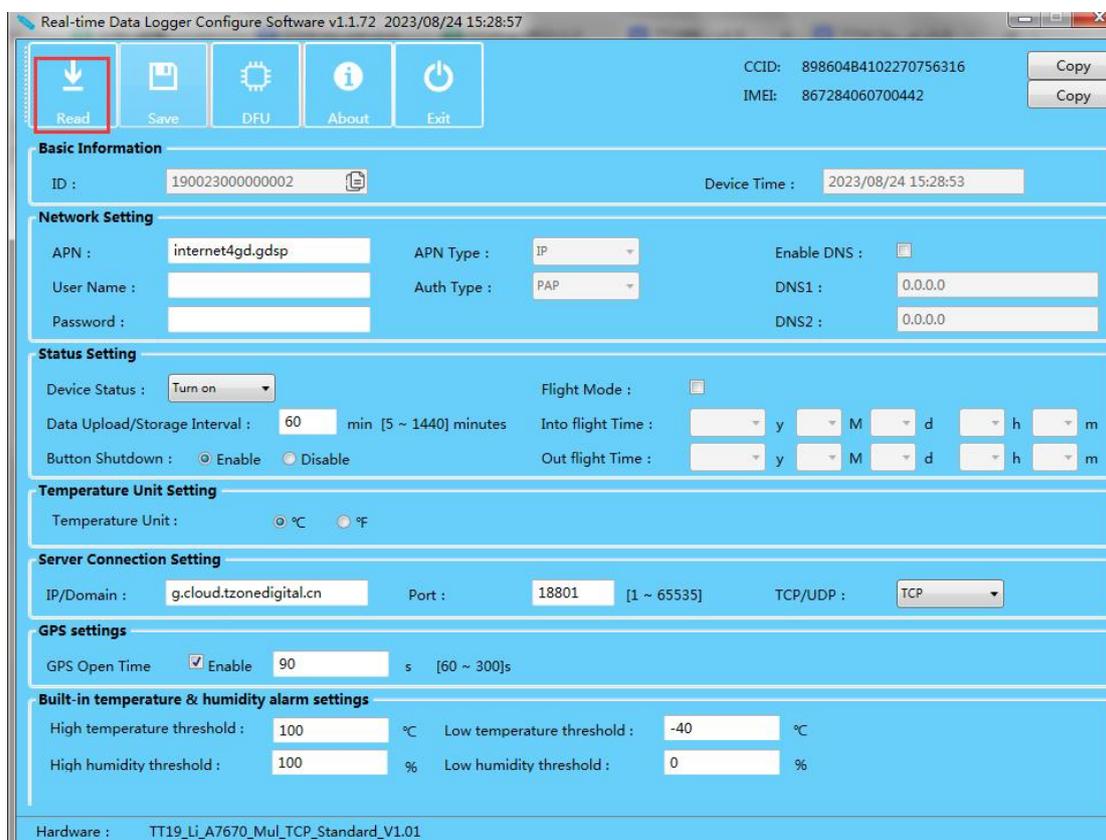

7. 设置好 SIM 卡的 APN、上传数据的平台 IP 地址与端口、发送间隔、GPS 开启时间等信息，设置完之后点击“保存”。

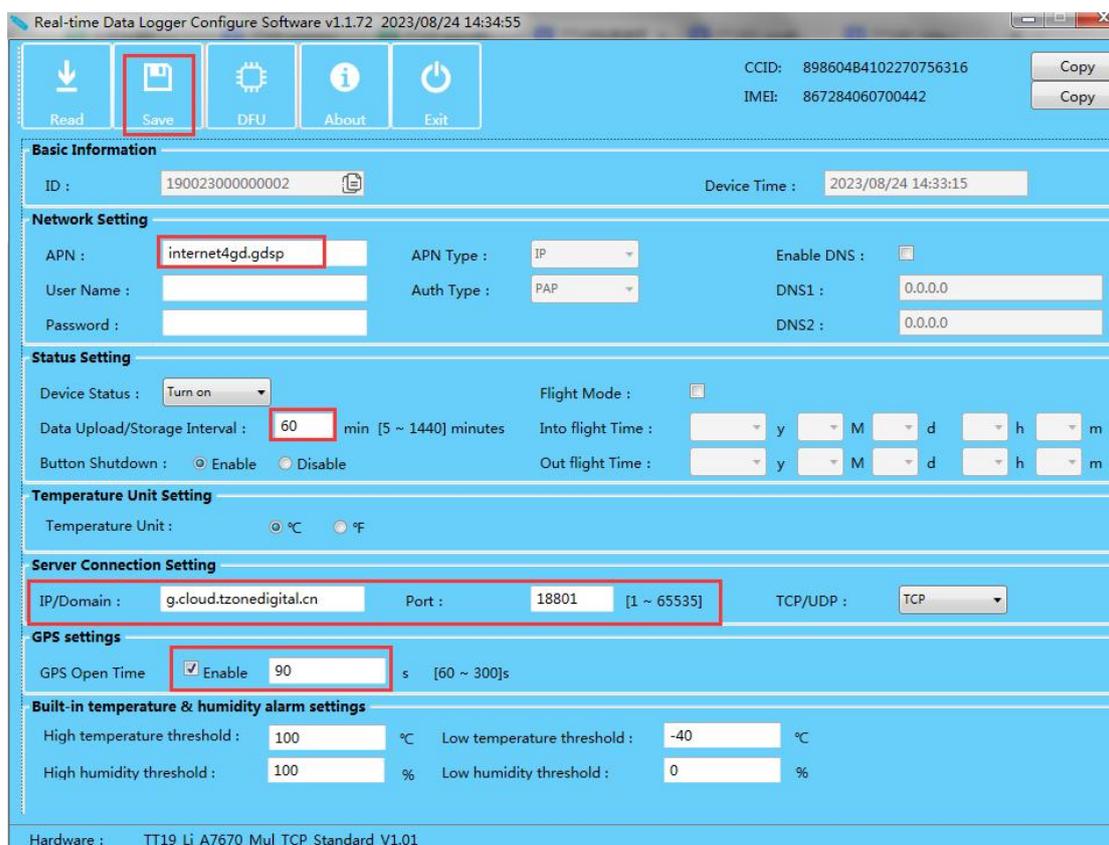


8. 配置完之后关闭配置软件，并拔掉 USB 线。

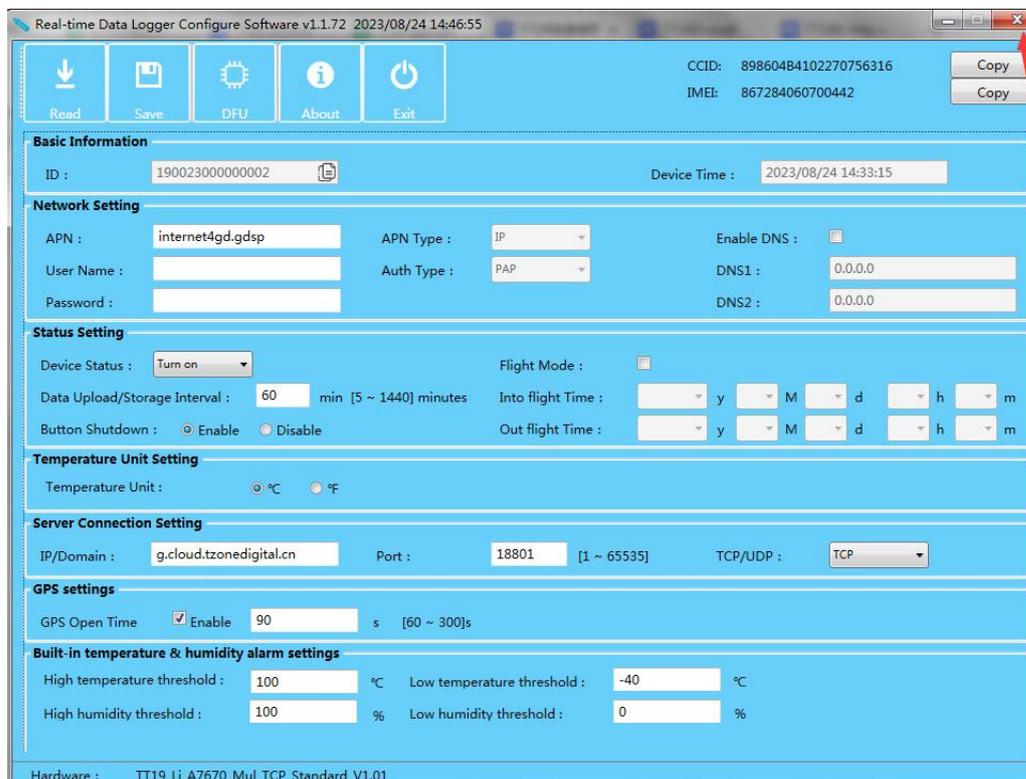

9. 将设备安装在温度监测现场，并发送数据。

10. 在 TZONE 云平台注册账号。

TZONE 云平台地址： <http://cloud.tzonedigital.com/>

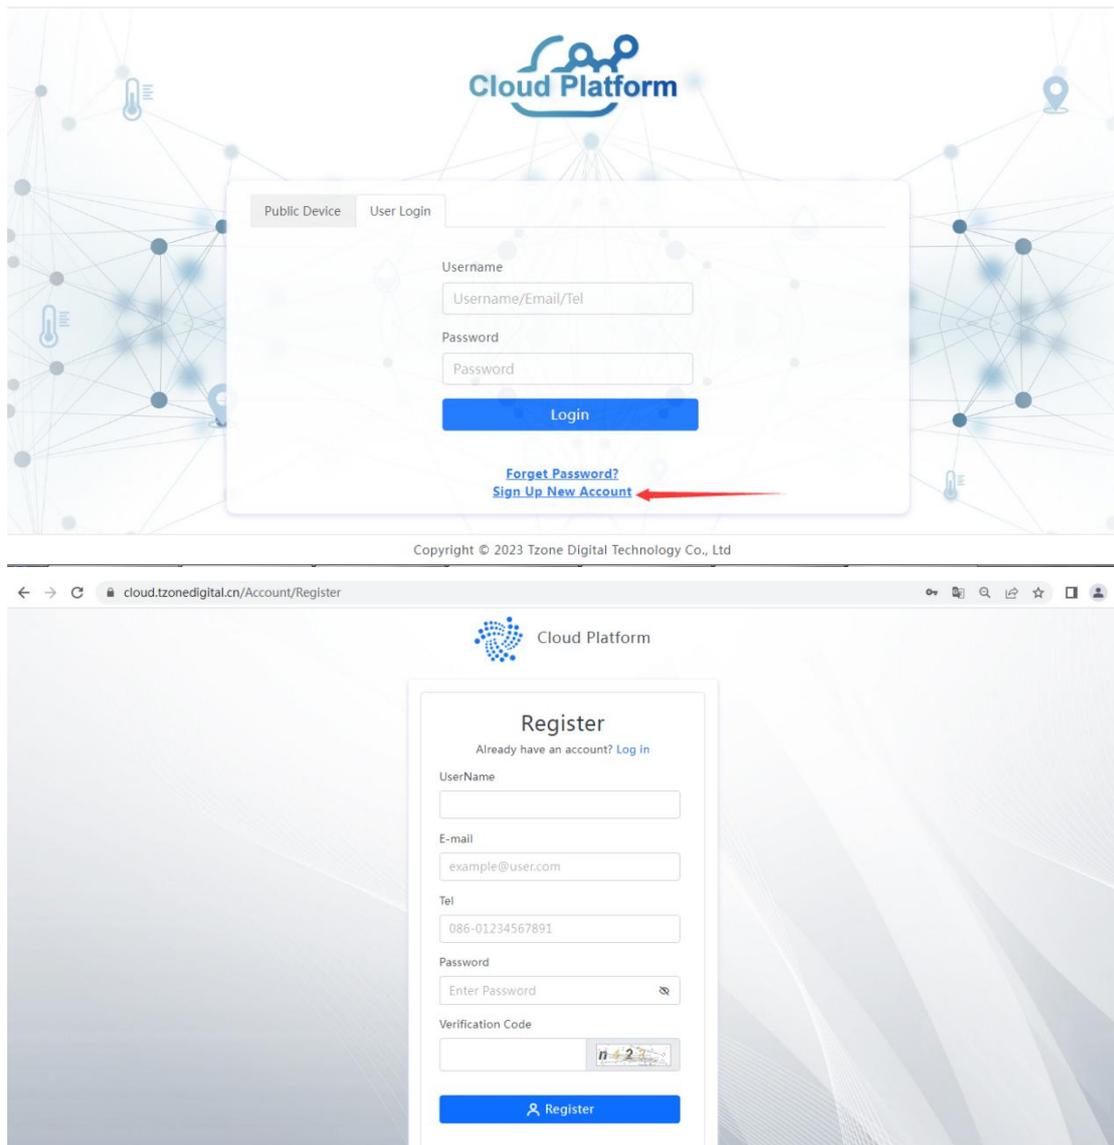

11. 注册帐号后，将设备 IMEI 添加到帐号中。

cloud.tzonedigital.cn/Console/Hardware/Device

Cloud Platform

tf950809 Standard

Overview

Real-time Monitoring

Device Management

Report

MESSAGE CENTER

Alarm Message

Exception Information

Notification Message

ACCOUNTS AND SETTINGS

Alarm Settings

Service

Account ID

Personalized

Device | > Device

Keywords:

Device Name/Device ID

Q Query

#	Device Name	Device ID	Model	Group	CreateTime	Expiration	Condition	Operate
1	TT19	190023000000001	TT19	Default	2023/06/09 14:16:55	2023/09/07 14:16:55	Online	   

Add Delete

Copyright © 2023 Tzone Digital Technology Co., Ltd

Add


* Device Name: TT19

* Device ID: 190023000000002

* Group: Default


Remark:

Device Address: 1 Jingtian 3rd St N, Futian District, Shenzhen

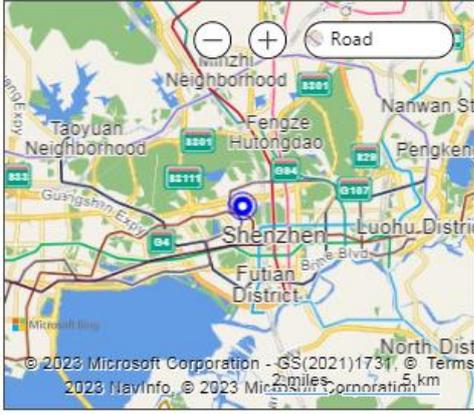


Note: Drag the blue marker on the map to set the device address.

Cancel Save

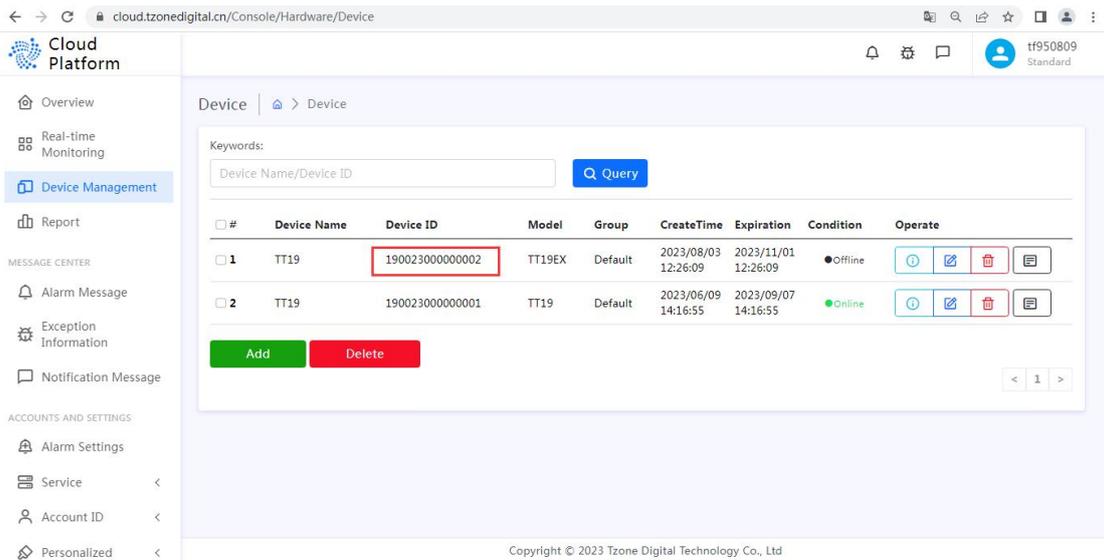


12. 查询数据

查询方式 1:

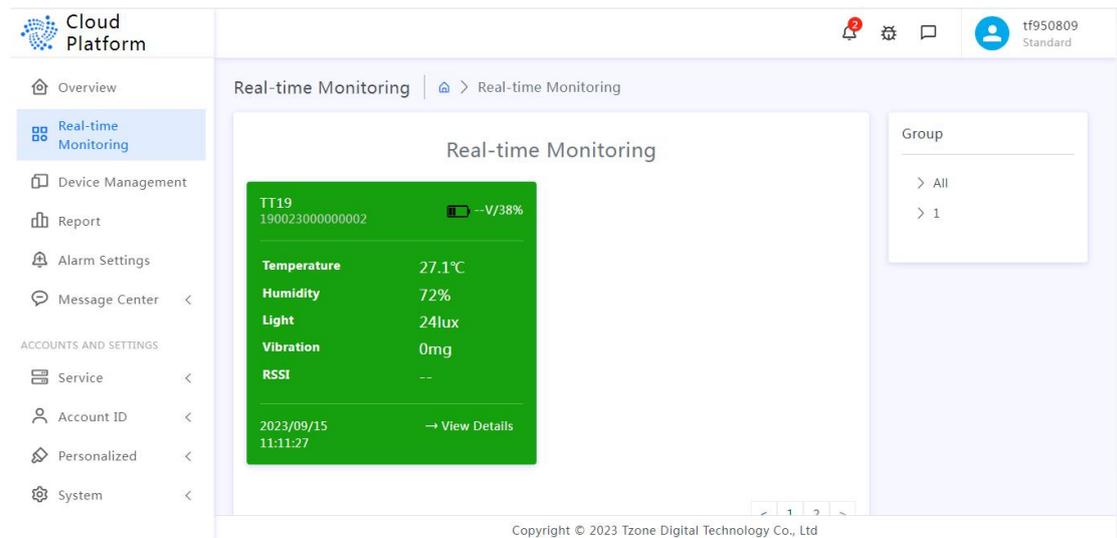

查看方式 2:



Device ID : 190023000000002

Temperature 27.1°C	Humidity 72%	Light 24lux
Vibration 0mg	Battery 38%	

2023/09/15 11:11:27


Chart List



2023/09/08 11:29 2023/09/15 11:29 View Download

Chart


Chart

2023-09-08 11:27 ~ 2023-09-15 11:11

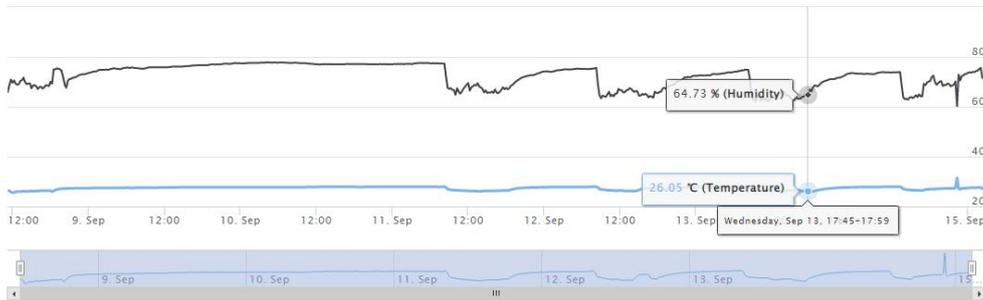

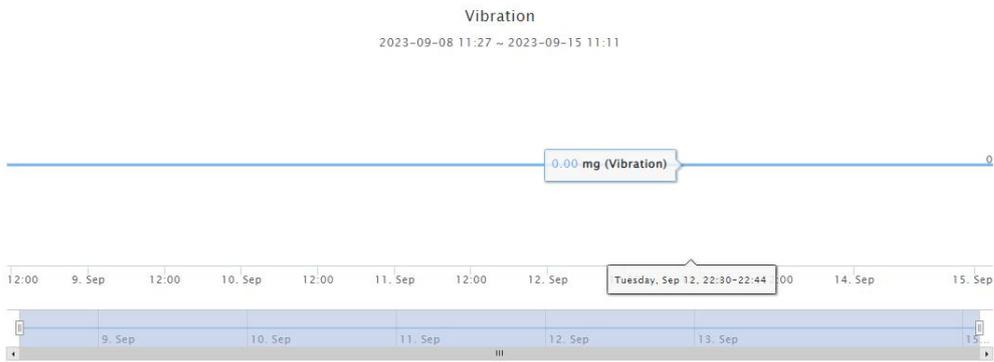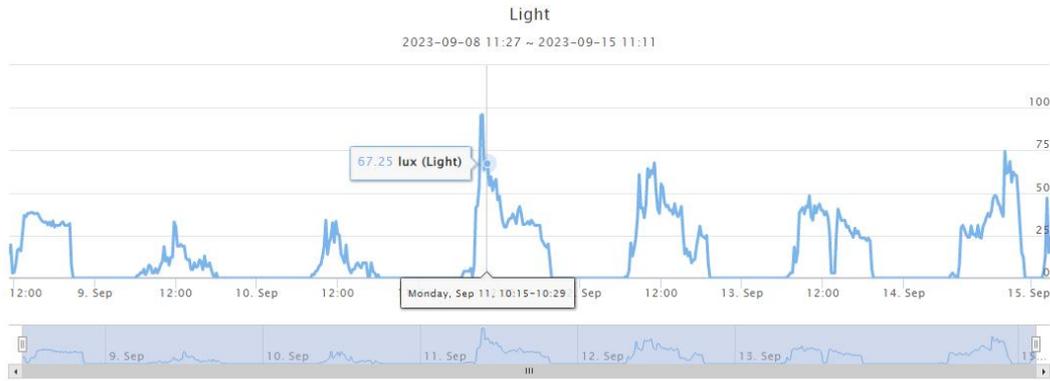

Tips: The query returns a maximum of 10000 data. If it exceeds, please change the time range.

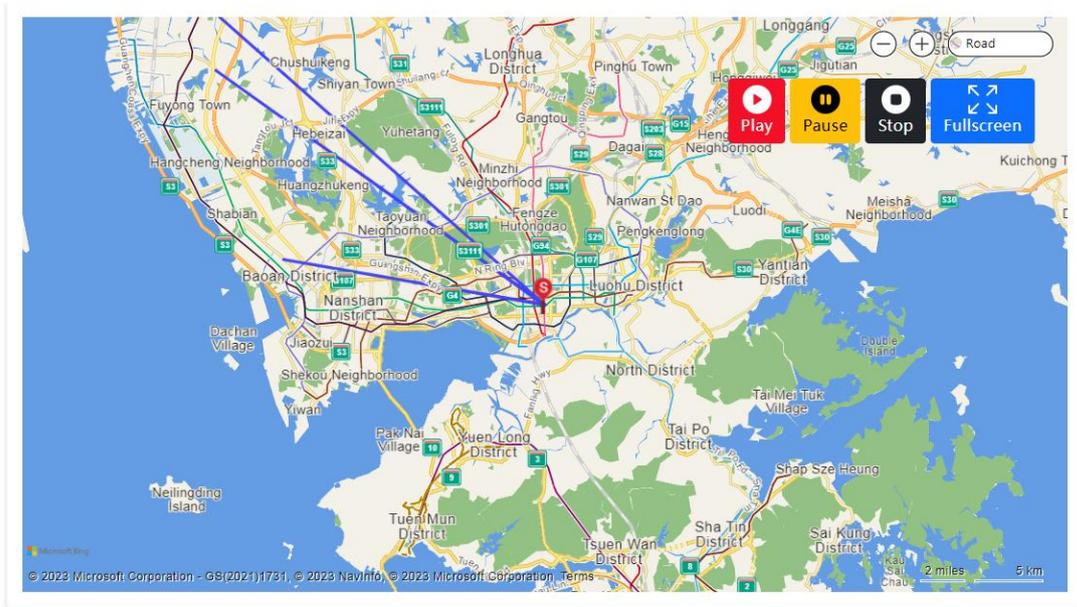

注意： 以上图片上的配置软件版本仅起展示作用，实际版本会不定期更新上传到我司网站：<http://d.tzonedigital.com/>